HYDRAULIC DRIVE SCISSOR LIFTS

0608 (2132) / 0808 (2732)

Compliant with CE/EAC standards

Model	0608 (2132)	0808 (2732)
Dimensions		
Max Working Height (Indoor/Outdoor)	8.3 m (27'3")	10.1 m (33'2")
A Max Platform Height (Indoor/Outdoor)	6.3 m (20'8")	8.1 m (26'7")
B Platform Extension	0.9 m (3')	0.9 m (3')
C Length-Stowed	2.39 m (7'10.1")	2.39 m (7'10.1")
D Width-Stowed	0.81 m (2'8")	0.81 m (2'8")
E Height-Stowed (Rails Folded)	1.83 m (6')	1.96 m (6'5")
E Height-Stowed (Rail Unfolded)	2.22 m (7'3.4")	2.35 m (7'8.5")
F Wheelbase	1.85 m (6'0.8")	1.85 m (6'0.8")
Ground Clearance (Pothole Guard Stowed)	0.073 m (3")	0.073 m (3")
Ground Clearance (Pothole Guard Deployed)	0.024 m (0.95")	0.024 m (0.95")
Platform Dimensions (L×W×H)	2.25 m×0.81 m×1.1 m (7'4.6"×2'7.9"×3'7")	2.25 m×0.81 m×1.1 m (7'4.6"×2'7.9"×3'7")
Performance		
Platform Capacity	380 kg (838 lbs)	250 kg (551 lbs)
Extension Platform Capacity	120 kg (265 lbs)	120 kg (265 lbs)
Platform Allowable Occupants (Indoor/Outdoor)	2 persons/1 person	2 Persons(Indoor Only)
Drive Speed (Stowed)	0~3.2 km/ h (0~2 mph)	0~3.2 km/ h (0~2 mph)
Drive-Speed (Raised)	0~0.8 km/ h (0~0.5 mph)	0~0.8 km/ h (0~0.5 mph)
Lift Time (Unloaded)	25 s~30 s	30 s~35 s
Lower Time (Unloaded)	30 s~35 s	34 s~39 s
Gradeability	25%	25%
Max Allowable Inclination (Front-To-Back/Side-To-Side)	3°/1.5°	3°/1.5°
Turning Radius (Inside/Outside)	0 m/2.1 m (0/6'10.7")	0 m/2.1 m (0/6'10.7")
Tire Size/Type	380×125 mm (15×5")/solid	380×125 mm (15×5")/solid
Power		
Drive×Steer	2 WD×2 WS	2 WD×2 WS
Power Source (V/kW)	24 V DC /3.3 kW	24V DC /3.3 kW
Hydraulic Tank Capacity	14L (3.1gal (UK) /3.7gal(US))	14L (3.1gal (UK) /3.7gal(US))
Batteries	24 V,220Ah (Lead Acid Battery)	24 V,220Ah (Lead Acid Battery)
Charger (Input/Output)	100～240 V AC/30A	100～240 V AC/30 A
Weight		
Weight (Indoor/Outdoor)	1,770 kg (3,903 lbs)	1,970 kg (4,344 lbs)(Indoor Only)
Standards Compliance	CE/EAC	

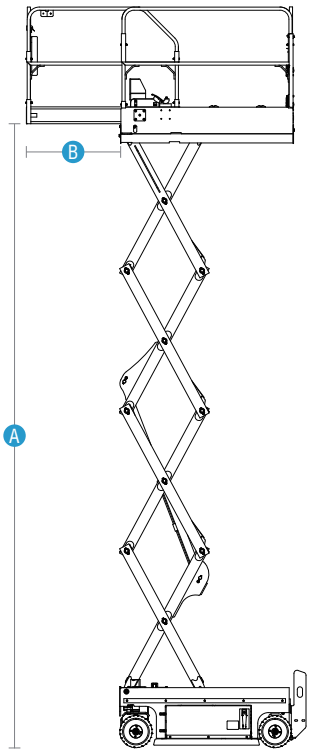

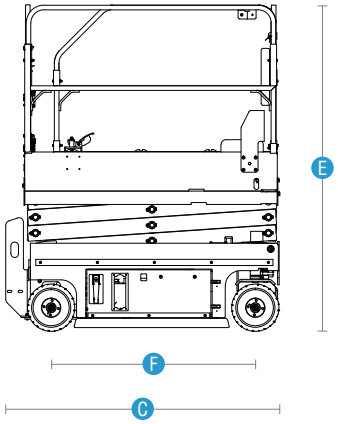

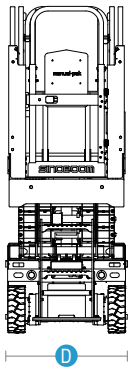

We reserve the right to make specification. The above represents the current specifications at time of publications. 07. 2023